

## Safety / Spectacles / 5X1

## 5X1 - Clear Plus

Code: 5X1.03.00.00

Date: 10-06-21

1/2

Multifunctional and versatile, the 5X1 was created to guarantee optimal protection in any working condition. On one frame it's possible to assemble a wide range of interchangeable accessories, ensuring every worker can personalise the 5X1 without compromising comfort and protection. The extended wraparound lenses provides extra coverage around the eyes.



## Frame mark (UE)

Mod5X1 U 166 FT U 175-F

## Lens mark

2C-1.2 U 1 FT K N CE

## Conditions of use

Low brightness, Standard brightness

## Lens color

Clear

## Frame technology

Adjustment of temples in inclination, Adjustment of temples in length, Floating Lens, Interchangeable Lens, Nose pad set-up, Rubber Terminal, SoftPad, Terminal tilting movement

## Lens technology

Anti-Scratch + Anti-Fog (KN - Vanguard PLUS), UV400

## Lens material

Polycarbonate

## Frame color

Dark grey/Green

## Standards

EN166, EN170

## Scale number

(2C-1.2)

## Mechanical resistance

Low energy impact (F)

## Optical class

Optical class (1)


## Optional requirements

Protection against high speed particles at extreme temperatures -5°/+55° C (T), Resistance to fogging of oculars (N), Resistance to surface damage by fine particles (K)

## Weight

28g

>> <https://www.univetsafety.com/en/products/safety/spectacles/5x1/5x1-clear-plus/>

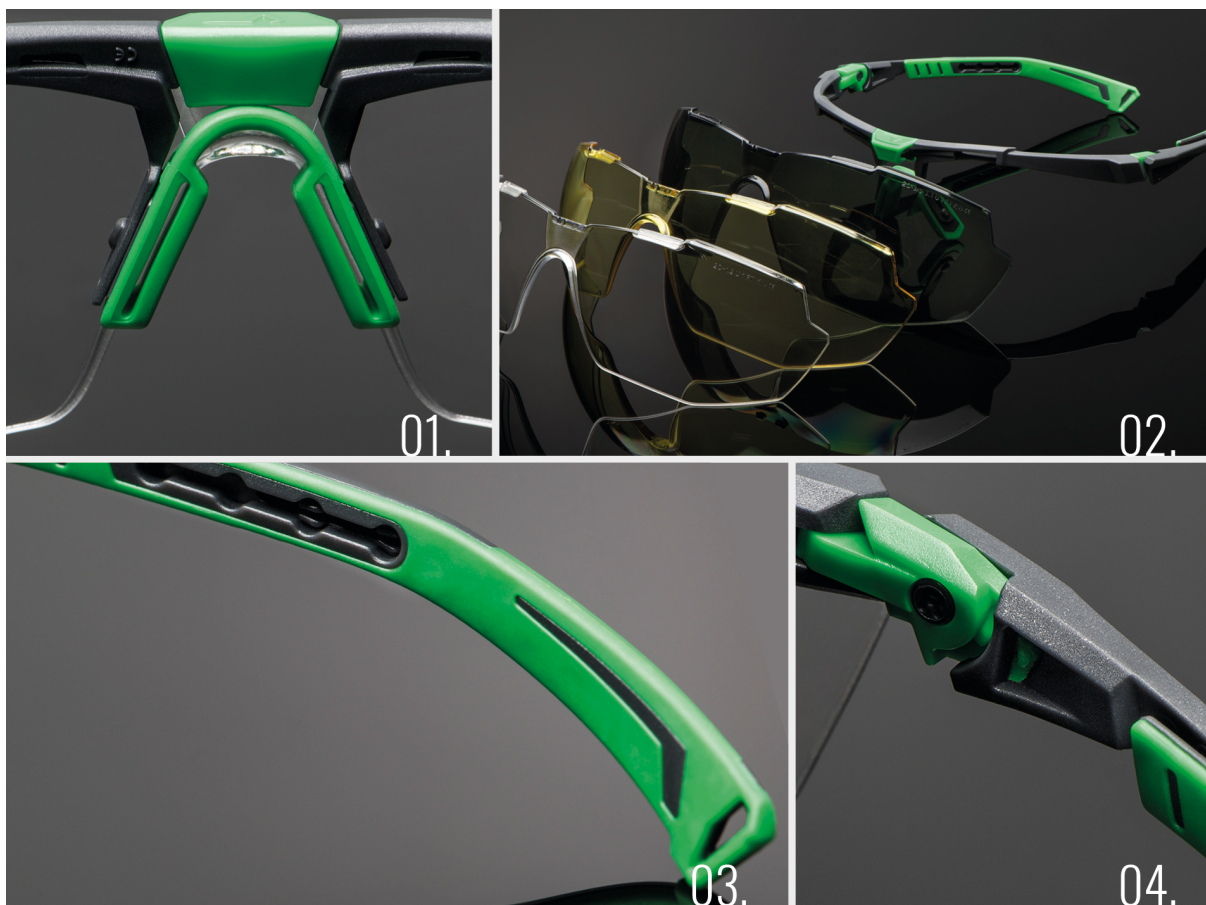

01.

**NOSE PAD SET-UP**

Allows to adjust the height of the glasses to ensure maximum optical quality

02.

**LENS INTERCHANGE SYSTEM**

Thanks to the patent lens exchange system it is possible to quickly replace the lens for optimal visibility in any environment

03.

**RUBBER TERMINAL WITH INCLINATION MOVEMENT**

Allows the glasses to adhere to the temples for a perfect grip

04.

**INCLINATION AND LENGTH ADJUSTMENT**

Allows correct fitting and constant safety at work

Attention! Any images on this page illustrate the frame technologies of the product family in question and may represent frame and lens colours that do not correspond to the product code of the following sheet.